

4 load cells scale

Weighing bars, the cheapest option. With a design that facilitates their transport and speeds up their assembly



FEATURES:

- Weighing bars.
- On-ground installation.
- They are supplied in pairs.
- Painted steel.
- Bars with handles and wheels for their transport. Their lower part is completely uncovered.
- Adjustable levelling feet. Version with rigid feet (XF1803Z) and pivot feet (XF1203Z) which help to achieve a lesser bar distortion.
- Load cells in aluminium, IP68.
- Interconnecting cables with connector.


- ABS indicator, model BR15.
- Backlight LCD display with six 30 mm height digits.
- Backlight of the display with 3 types: automatic, activated and deactivated.
- IP54 protection.
- Waterproof keyboard with 5 function keys and ON/OFF keys.
- Power supply with adaptor AC/DC 110-240Vac 50-60 Hz.
- Rechargeable internal battery 6V/4Ah.
- RS232 output PC and print formats.
- Auto switch off (programmable: from 1 to 99 minutes).
- 2 meters of cable for each weighing bar with a single connector.

FUNCTIONS:

- Accumulation
- Totalization
- Piece counting
- Zero
- Hold 4 modes: deactivate, filter for animals, peak value, stable weight and stable weight with auto cancel in zero
- Checkweighing function visual and alarm signals
- Three speeds of AD converter (high, medium and low)
- Gross/Net
- Tare



Indicator BR15

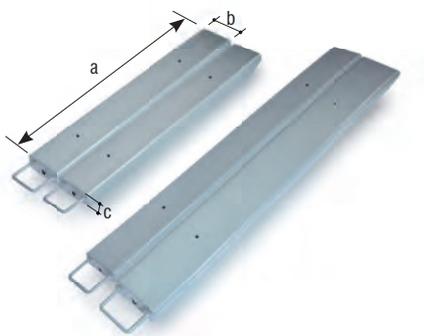

Wheels for transport



Adjustable feet



Lifting handle for transport

Dimensions (mm)	a	b	c
260741	800	120	60
260742	1250	120	60

Code #	Capacity (kg)	Readout (g)	Dimensions (mm)	Packing dimensions (mm)	Packing weight (kg)	Certifications	
						ENAC	Code #
260741	3000	1000	800x120	330x960x170	26+3,2	900004	
260742	3000	1000	1250x120	+330x250x220	33+3,2	900004	

Accessories	
Code #	Accessories description
270165	Anchorage pan

*See optional indicator BR15