4 load cells scale

Pallet weighing, for the weighing of European pallets

PCS	MOVE	RS232	RS232	BAT INT	AC/DC	IP54	NO VERIF

FEATURES:

- Pallet weighing set in painted steel.
- Installation on ground.
- Structure of U cold-formed profile.
- Junction box in ABS IP66.
- 2 wheels for transport and handle for easy transport.

- ABS indicator, model BR80.
- Red LED display with 6 digits of 20 mm.
- 7 LEDs to indicate the condition.
- IP54 protection.
- Waterproof keyboard with 6 function keys and ON/OFF keys.
- Rechargeable internal battery 6V/4Ah, 30 hour battery life.
- Operating temperature range: -10ºC to +40ºC.
- Weight tare indicator.
- Power supply with adaptor AC/DC 240Vac 50Hz.
- Units: kg and lb.
- RS232 output (PC and print formats).
- Auto switch off

FUNCTIONS:

- Accumulation
- Totalization
- Piece counting
- Zero
- Gross/Net
- Weight filter for animals
- Programmable gravity
- Pretare
- High resolution (allowing to visualize some more digits)

80

1250

120   840
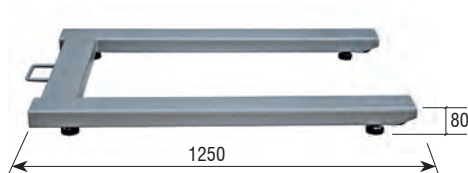
Dimensions (mm)

Wheels for transport

Lifting handle for transport

Load cell

Certifications
ENAC

Code #	Capacity (kg)	Readout (g)	Packing dimensions (mm)	Packing weight (kg)		Code #
260370	1500	500	1350x900x90+330x250x220	40+3,2		900003